

NON- ASBESTOS GASKET

Binder	NR/NBR
Colour	Green
Tensile Strength	12 MPa
Density Ratio	1.8 G/cc
Recovery	> 40%
Max. Pressure	4 MPa
Max. Temp.	350 C
Stress Relaxation	< 50%
Compressibility	8%
Anti- Stick	Contact MSSquare



Greentek 30

Greentek 30

Greentek 30 is a medium quality compressed sheet material based on aramid fibre with a NR/NBR binder system.



Service:

Greentek 30 is a general purpose material suitable for use in a wide range of applications, including hot and cold water , steam, oils, fuels gases and a wide range of general chemicals



NON - ASBESTOS GASKET

Binder	Aramid/ NBR	
Colour	Green	
Density Ratio	1.95 g/ cc	
Tensile Strength	DIN	13 N/mm ²
Compressibility	ASTM F36	8%
Recovery	ASTM F36	60%
Max. Pressure	110 bar	
Max. Temp.	400 C	
Stress Relaxation	-	
Approvals	DVGW, KTW, TA-Luft, WRC, ABS Fire Safe	

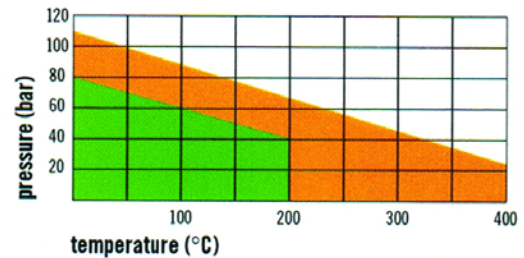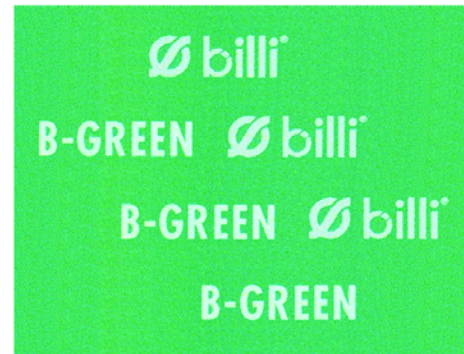

Billi B-GREEN 

B-GREEN is high quality compressed gasket sheet produced from Aramid fibers and bonded with NBR Rubber.

Service:

Suitable for sealing petroleum derivatives, water, saturated steam, gases or chemical product in general.

Exceptional performance in gas application.