


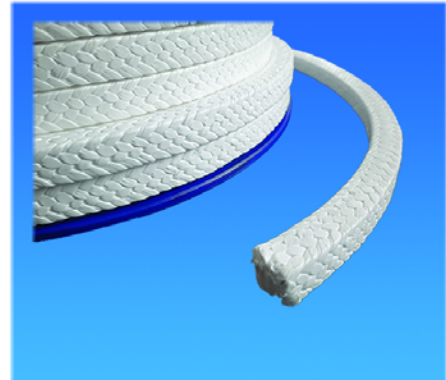


## GLAND PACKING

			
Pressure ( bar)	20	100	200
Speed (m/s)	22	3	1.5
PH Range	0-14		
Temp (C)	-180 to 260		



Greentek 6000 EXP

### Pure PTFE **without** Lubricant (Greentek 600 EXP) FOOD GRADE

Greentek 6000 EXP is made of 100% white expanded PTFE yarn. It contains no impregment, has no lubricant, and has no finish treatment

#### Service:

Greentek 6000 EXP is designed for use in valves and low speed service. It suitable for valve in food processing, pharmaceuticals, paper mill where high purity and corrosion resistance is required

Standard Size	1/8"	1/4"	3/8"	1/2"	5/8"	3/4"
Lenght ( m/ 5.5 lb)	-	40.2	18.4	-	-	-
Lenght ( m/ 11 lb)	-	-	36.8	19.2	13.4	9.4

Note: Approximate length