


# GLAND PACKING



Pressure ( bar)	10	100	100
Speed (m/s)	8	2	1.5
PH Range	0-14		
Temp (C)	max +260		

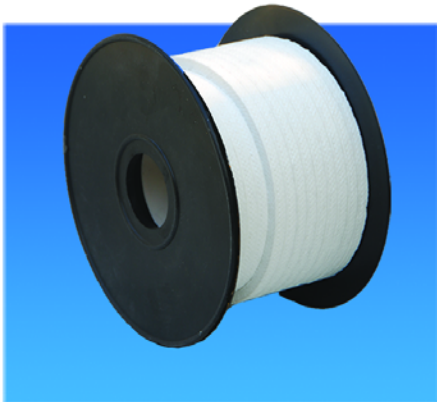

Greentek 6000 W

Pure PTFE with Lubricant (Greentek 6000W ) FOOD GRADE

Greentek 6000 W is inter lock braided PTFE yarn, long lubricant squeezed out under operating pressure soft. Self-Lubrication applicable for dynamic seal at high linear speed. Lowcoefficient of friction results in easy shaft running.

Service:

Greentek 6000 W is suitable for use in the chemical industrial, food stuff and pharmaceutical industrial. It can be used in valves, agitators, mixers, expansion joints

Standard Size	1/8"	1/4"	3/8"	1/2"	5/8"	3/4"
Lenght ( m/ 5.5 lb)	-	53.6	15.2	-	-	-
Lenght ( m/ 11 lb)	-	-	30.4	17.4	11.0	8.0

Note: Approximate length