


GLAND PACKING



Pressure (bar)	25	200	150
Speed (m/s)	25	2	1
PH Range	0-14		
Temp (C)	-200 to 280		

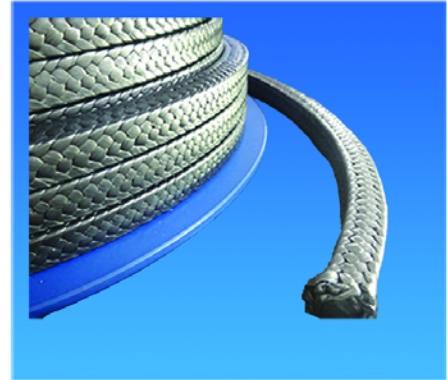

Greentek 6200 GFO

Graphite and PTFE (Greentek 6200 GFO)

Greentek 6200 GFO is made from graphite -PTFE compound without lubricant. Very good thermal conductivity. High flexibility and volumetric stability. Gentle treatment of shafts.

Service:

Greentek 6200 **GFO** is suitable for use in pump, agitator, mixer involving high peripheral speeds and temperature where pure PTFE packing fail

Standard Size	1/8"	1/4"	3/8"	1/2"	5/8"	3/4"
Lenght (m/ 5.5 lb)	-	45.3	18.4	-	-	-
Lenght (m/ 11 lb)	-	-	36.8	20.1	13.4	9.8

Note: Approximate length