


GLAND PACKING



Pressure (bar)	35	100	-
Speed (m/s)	25	1.5	-
PH Range	2 - 12		
Temp (C)	max. 650		

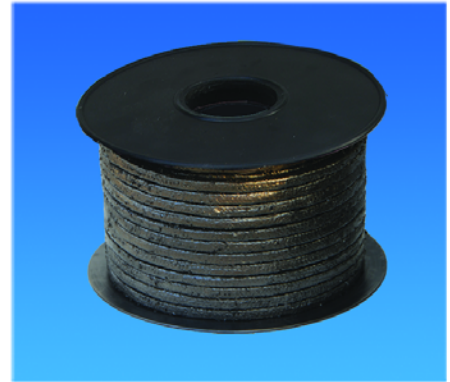

Greentek 6900 HG

High Carbon Packing with PTFE impregnated (Greentek 6900HG)

Greentek 6900HG braided from high carbon continuous yarns after softening, impregnated with proprietary lubricants and graphite particles which fill voids, act as a break-in lubricant, and block leakage

Service

Greentek 6900HG use for pump or valve in high pressure and high temperature and suitable for all media such as steam, hot gas, solvents, heat transfer agents etc.

Standard Size	1/8"	1/4"	3/8"	1/2"	5/8"	3/4"
Length (m/ 5.5 lb)	-	46.8	22.0	-	-	-
Length (m/ 11 lb)	-	-	-	23.0	15.3	11.4

Note: Approximate length